





Installation Instructions





Star Hitch Model 30A Fifth Wheel Adapter

1. Install Locking Collar (Fig. 1)
2. Slide Locking Collar over the King Pin per drawings and Instructions in (fig. 2).
3. Slide Hitch upwards over the Locking Collar (Fig. 3) - follow Instructions in Fig. 3.

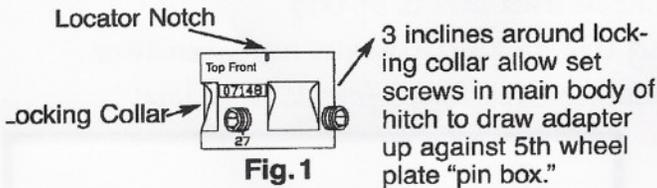

Bolt kit is included. It is recommended that hitch flange be bolted to the Pin Box Base after adapter body cap screws are securely fastened and jamb nuts locked down.
Welding adapter could damage RV pin box base.

Standard 12",14",16"Lengths

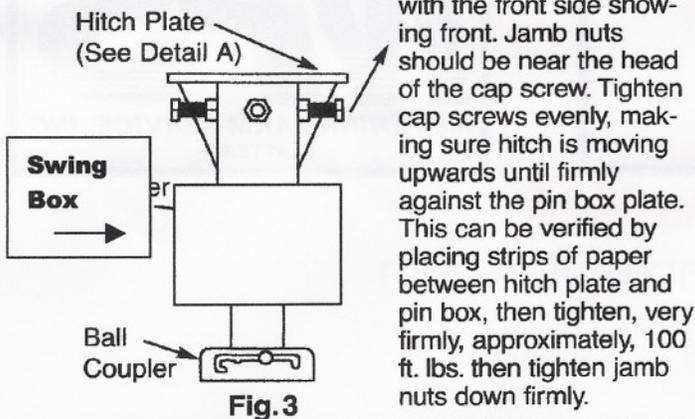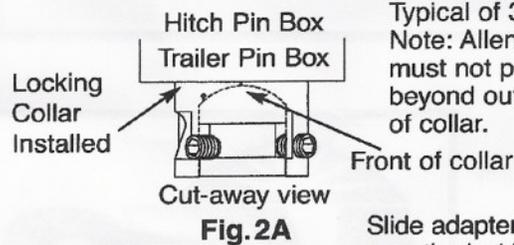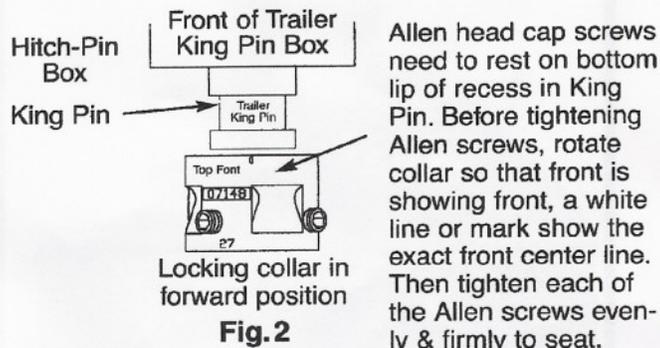

CAUTION!
 Back towing vehicle under RV. Level RV and measure distance from 2 5/16" ball to pin box base as shown in diagram at left. Use closest length to that measurement. Hitch measures +3" to bottom of ball coupler.



Shown at left is properly installed Model 30A. Top coupler of offset is on trailer end and extra swing box towards towing vehicle. Offset gives more clearance between vehicle and trailer. Red handle of coupler towards trailer

The Model 30A comes with safety chains to secure hitch to towing vehicle.
ALWAYS secure chains and lock ball coupler before operating.
Check all vehicle trailer clearances and equipment before towing.
Safety First and Forever!

Phone Star Performance Hitch Distribution @ 605-723-4245 or contact your authorized Star Performance Hitch dealer if you have any questions regarding proper installation of the Model 30A 5th Wheel King pin adapter. **Thank you for using Star Performance Hitch!**